



# DEK-CAP™

## Standing Seam Roof End Cap Flashing





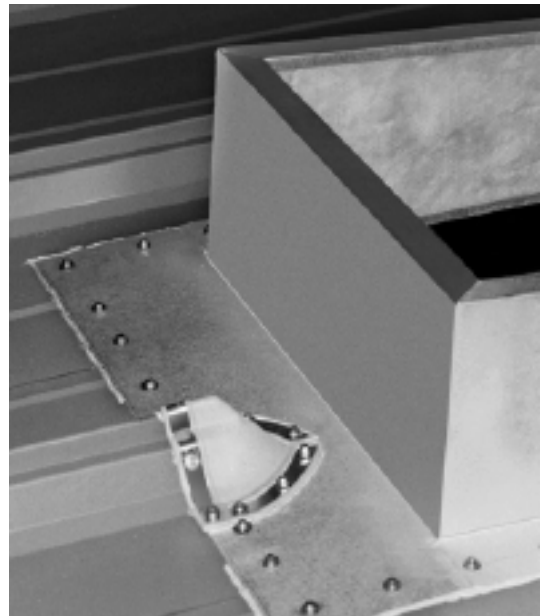

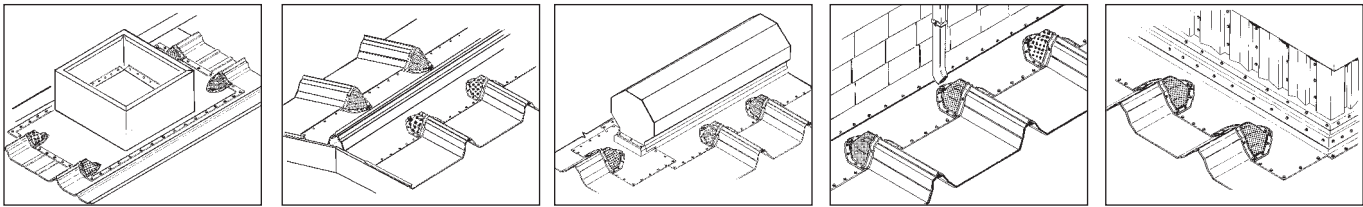


The only universal end cap flashing!!



### Applications




### Product Features

-  Universal design allows use on left and right handed seams.
-  Flexible, corrosion resistant aluminum base conforms to the majority of standing seam roof panels.
-  Pre-formed panel profile shape is designed to reduce installation time.
-  Fastening locations are clearly indicated for accurate installation.
-  Dual underside ridges provide maximum sealing protection.
-  Thermal elastomer material provides excellent resistance to ozone, ultra-violet light and extreme temperatures.
-  Thermal elastomer has a continuous temperature of -40°F to +250°F.
-  Expansion notch provides added installation flexibility.
-  Interior panel stop ensures correct installation position.

### Product Specifications

Material..... Thermal Elastomer  
 Width..... 7-1/4"  
 Length..... 5-3/4"  
 Height..... 3-5/16"  
 Color..... Gray

## Selector Guide



Part Number	Description	Applications	Box Quantity
4146910	Dek-Cap	Metal Curbs, Skylights, Ridge Applications, Jobsite Retrofit	10

## Performance Data

ASTM Method	Test Description	Test Specification	Results
D412	Tensile Strength (min. psi rating)	1450 psi min.	1500 PSI
D412	Ultimate Elongation (%)	350 min.	450
D1171	Resistance to Ozone-min. rating	100 (no cracks)	Passed
D573	Heat Aging - 70 hrs. at +212°F •Change in Hardness (points) •Change in Tensile Strength (%) •Change in Elongation (%)	± 15 max. ± 30 max. ± 50 max.	+3 +2 -3

ASTM Method	Test Description	Test Specification	Results
D2137	Low Temperature Brittleness-3 mins. at -40°F	Non-brittle	Passed
D624	Tear Resistance Die C (min.)	125 pounds per inch of width min.	Passed


## Installation Guidelines



**STEP 1:**  
Bend top so that both sides are parallel to metal roof.




**STEP 2:**  
Press Dek-Cap edges into contours of panel configuration.



**STEP 3:**  
Remove and apply sealant on underside of flexible aluminum edging.



**STEP 4:**  
Slide Dek-Cap flashing over panel profile.



**STEP 5:**  
Follow indicated fastening pattern to attach Dek-Cap to surface with Buildex Scots® self-drilling fasteners.



**STEP 6:**  
Apply additional sealant around base if desired.

Recommended Sealant: Chemseco Sikaflex® sealant, part number 4040910.



1349 West Bryn Mawr Avenue  
Itasca, Illinois 60143  
630-595-3500 Fax: 630-595-3549  
www.itwbuildex.com

Dek-Cap™ and Scots® are trademark of ITW Buildex and Illinois Tool Works, Inc.  
Sikaflex® is a registered trademark of Chemseco Corporation.

© 2010 ITW Buildex and Illinois Tool Works, Inc.